


Part 1 - Dimension Limits

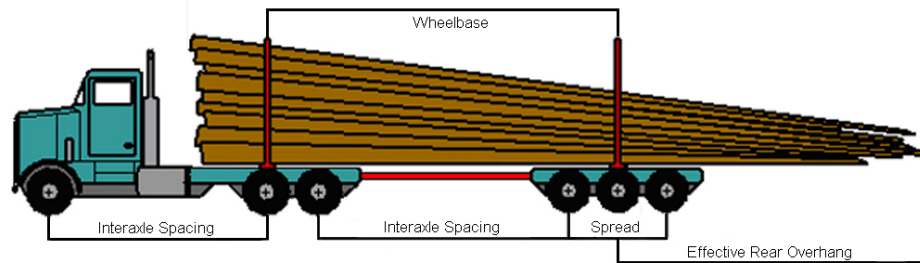

DIMENSION	LIMIT
Overall Length	Maximum 23.0 metres
Overall Width	Maximum 2.6 metres
Overall Height	Maximum 4.15 metres
Truck	
Length	Maximum 12.5 metres
Wheelbase	Not Controlled
Hitch Offset	Maximum 1.8 metres
Tandem Axle Spread	Minimum 1.2 metres / Maximum 1.85 metres
Pole Trailer	
Trailer Length	Maximum 12.5 metres
Effective Rear Overhang	Maximum 4 metres
Tridem Axle Spread	Minimum 2.4 metres / Maximum 2.5 metres
Track Width	Minimum 2.5 m / Maximum 2.6 m
Interaxle Spacings	
Single Steer to Tandem Axle	Minimum 3.0 metres
Tandem Axle to Tridem Axle	Maximum 5.5 metres

“**effective rear overhang**” means the longitudinal distance from the turn centre of the rear axle group of a commercial vehicle to the rearmost point of

- (i) the vehicle, or
 - (ii) the load on the vehicle,
- whichever is the greater distance;

as defined in [Commercial Vehicle Dimension and Weight Regulation 315/2002](#), Section 1(p).


“**hitch offset**” means the longitudinal distance from the rear turn centre of a semi-trailer, truck or full trailer to the centre of the hitching mechanism provided for towing a trailer behind the semi-trailer, truck or full trailer

as defined in [Commercial Vehicle Dimension and Weight Regulation 315/2002](#), Section 1(v).

“**trailer wheelbase**” means the longitudinal distance from the centre of the kingpin on a semi-trailer, the centre of the turntable on a full trailer or the centre of the hitch device on a pony trailer, to the trailer turn centre;).

as defined in [Commercial Vehicle Dimension and Weight Regulation 315/2002](#), Section 1(aaa).

Part 2 - Weight Limits

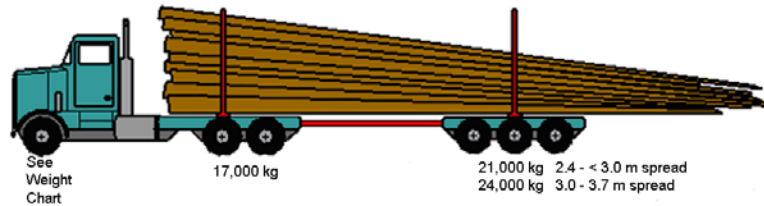

WEIGHT	LIMIT
Steering Axle	Maximum 7,300 kg
Tandem Drive – Dual tires	Maximum 17,000 kg
Tridem Trailer Axles	
Dual tires with axle spread from 2.4 m to 2.5 m	Maximum 21,000 kg
Gross Vehicle Weight Limits	Cannot exceed the sum of the maximum regulated axle weights and is subject to minimum interaxle spacing.

A pole trailer is a pony trailer and limited to regulated dimensions and weights of a pony trailer as per Commercial Vehicle Dimension and Weight Regulation AR315/2002.

Note maximum axle spread and weights on tridem axle group.

Note: All axle weights are subject to minimum tire size. See [STEERING AXLE Tire Weight Chart](#)
Maximum steering axle weight as per [Commercial Dimension and Weight Regulation AR 315/2002](#)

9(1) Subject to section 62 of the Act and section 12(1) of this Regulation, no person shall operate a commercial vehicle on a highway when

(a) the gross weight on a tire exceeds the smallest of the following:

(i) 3650 kilograms;

(ii) the capacity determined by multiplying the cross section dimension of the tire in millimetres, as determined by the manufacturer's width shown on the tire, by 10 kilograms;

(b) the gross weight on

(i) a steering axle exceeds

(A) in the case of a truck tractor, 5500 kilograms;

(B) in the case of a truck, bus, picker truck, bed, truck or winch truck, 7300 kilograms *

STEERING AXLE Tire Weight Chart for Trucks

ALLOWABLE STEERING AXLE WEIGHTS		ALLOWABLE STEERING AXLE WEIGHTS		PICKER STEERING WEIGHTS WITH ANNUAL PERMIT		
Tire Size	Single Steer	Tire Size	Single Steer	Tire Size	Tire Size	Single Steer
(inches)	Maximum Weight (kg)	(mm)	Maximum Weight (kg)	(inches)	(mm)	Maximum Weight (kg)
210	5,100	285	5,700			
211	5,600	305	6,100			
212	6,100	315	6,300			
213	6,600	335	6,700			
214	7,100	365	7,300			
215	7,300	385	7,300	215	385	7,700
216	7,300	425	7,300	216	425	8,500
218	7,300	445	7,300	218	445	9,100

* See [log picker specifications](#) for maximum GVW with configurations equipped with picker trucks.

* See [picker specifications form](#) to apply for a permit allowing steer axle weight to exceed 7,300 kg.

* For picker trucks which have a multi-trip permit for the steering axle weight to exceed 7,300 kg, the permitted steering axle weight indicated on the permit shall apply. See copy of [Attached Conditions](#).

* The carrier must have a valid TAC permit and County/MD approval to travel on local roads. Otherwise, the regulated weight on local roads is limited to 17,000 kg for tridem axles and 53,500 kg GVW.