



Part 1 - Dimension Limits

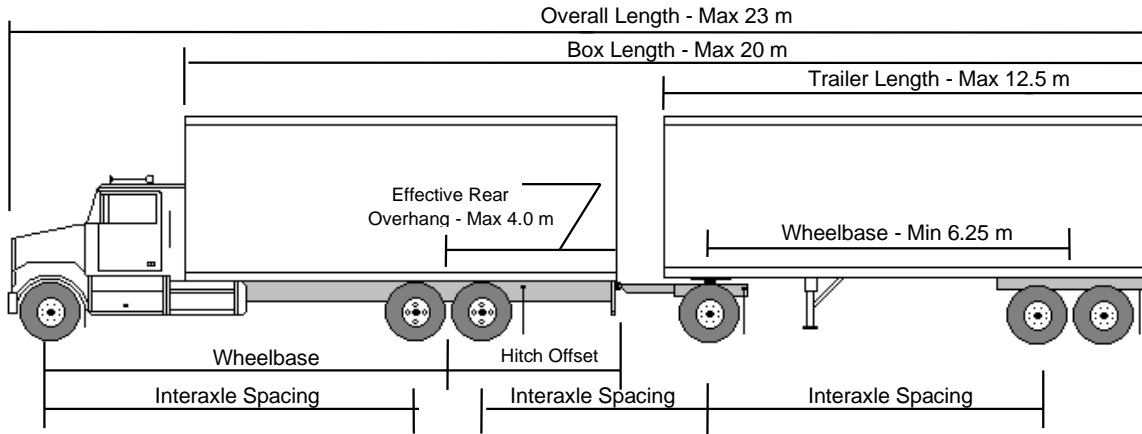

| DIMENSION | LIMIT |
|----------------------------|---|
| Overall Length | Maximum 23.0 m |
| Overall Width | Maximum 2.6 m |
| Overall Height | Maximum 4.15 m |
| Box Length | Maximum 20.0 m |
| Truck | |
| Length | Maximum 12.5 m |
| Wheelbase | Not controlled |
| Effective rear overhang | Maximum 4.0 m |
| Hitch offset | Maximum 1.8 m |
| Full Trailer | |
| Length | Maximum 12.5 m |
| Wheelbase | Minimum 6.25 m |
| Track Width | Minimum 2.5 m/Maximum 2.6 m |
| Converter Dolly | The use of a double drawbar or C Dolly is not permitted in this combination |
| Axle Spreads | |
| Tandem axle | Minimum 1.2 m / Maximum 1.85 m |
| Interaxle Spacings | |
| Single to single or tandem | Minimum 3.0 m |
| Tandem to tandem | Minimum 5.0 m |

Note: a tridem axle is not allowed on a full trailer.

Part 2 - Weight Limits

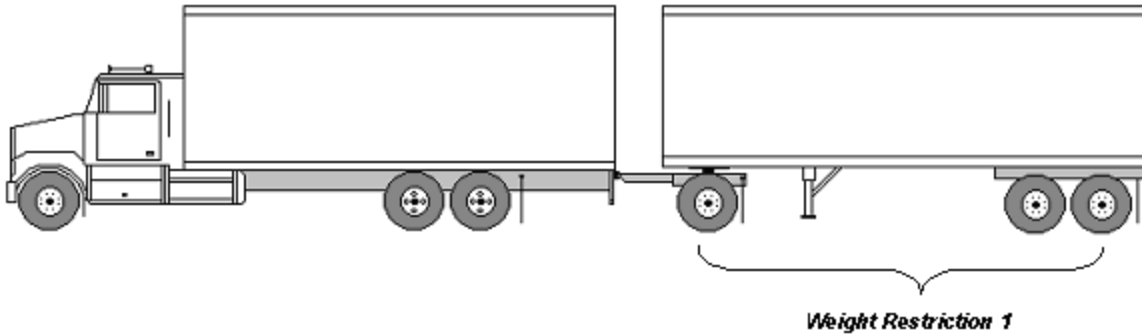

| WEIGHT | LIMIT |
|--------------------------------------|--|
| Axle Weights:*** | |
| Steering Axle | Maximum 7300 kg |
| Single Axle | |
| Single tires | Maximum 7300 kg |
| Super single tires | Maximum 7700 kg * |
| Dual tires | Maximum 9100 kg |
| Tandem Axle: | |
| Single tires | Maximum 13,600 kg |
| Super single tires | Maximum 15,400 kg * |
| Dual tires | Maximum 17,000 kg |
| Weight Restriction 1: | |
| Sum of axle weights of full trailer. | Maximum 31,000 kg |
| Gross Vehicle Weight Limits | |
| See Weight Calculator | Cannot exceed the sum of the maximum legal axle weights up to a maximum of 55,300 kg** |

* Super single tires require the "New Generation, Wide Base" tires with a minimum tire width of 445 mm. Available by permit only. Super single tires do not apply to the steering axle.

** This GVW applies to provincial highways only. The maximum GVW on a municipal road is 53,500 kg. Permits may be available to achieve heavier weights.

*** All axle weights are subject to minimum tire size. The maximum weight per tire shall not exceed the lesser of the tire manufacturer's weight rating or the width of the tire stamped on the sidewall multiplied by 10 kg/mm.