



Part 1 - Dimension Limits

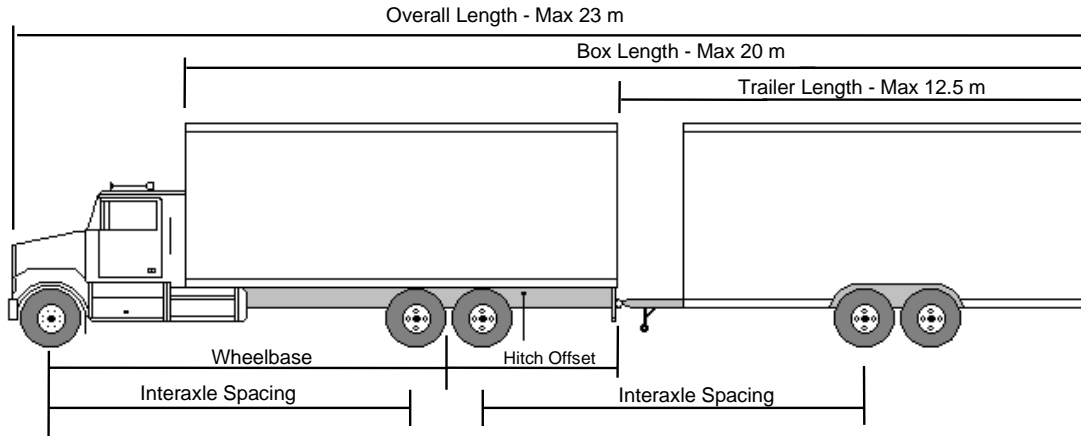

DIMENSION	LIMIT
Overall Length	Maximum 23.0 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20.0 m
Truck	
Length	Maximum 12.5 m
Wheelbase	Not controlled
Effective rear overhang	Maximum 4.0 m
Hitch offset	Maximum 1.8 m
Pony Trailer	
Length	Maximum 12.5 m
Wheelbase *	Minimum 6.25 m
Track Width *	Minimum 2.5 m/Maximum 2.6 m
Effective Rear Overhang	Maximum 4.0 m
Axle Spreads	
Tandem axle	Minimum 1.2 m / Maximum 1.85 m
Tridem axle	Minimum 2.4 m / Maximum 2.5 m
Interaxle Spacings	
Single to single, tandem, or tridem	Minimum 3.0 m
Tandem to tandem	Minimum 5.0 m
Tandem to tridem	Minimum 5.5 m

* Limits not applicable to pony trailers with Gross Vehicle Weight Rating of less than 10 000 kg.

Part 2 - Weight Limits

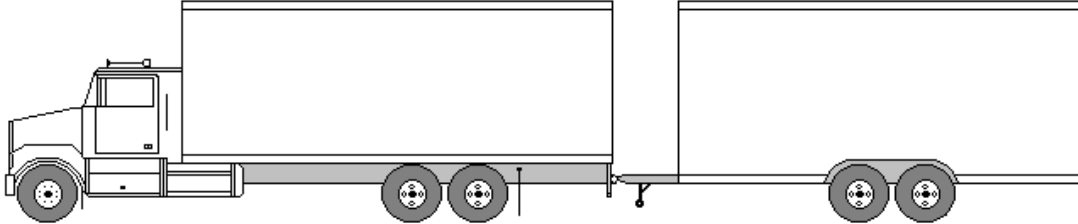

WEIGHT	LIMIT
Axle Weights:****	
Steering Axle	Maximum 7300 kg
Single Axle	
Single tires	Maximum 7300 kg
Super single tires	Maximum 7700 kg *
Dual tires	Maximum 9100 kg
Tandem Axle:	
Single tires	Maximum 13,600 kg
Super single tires	Maximum 15,400 kg *
Dual tires	Maximum 17,000 kg
Tridem Axle:	
Single and super single tires	Maximum 19,000 kg ***
Dual tires with axle spread 2.4 m to less than 2.5 m	Maximum 21,000 kg ** ***
Gross Vehicle Weight Limits	
See Weight Calculator	Cannot exceed the sum of the maximum legal axle weights and is subject to minimum interaxle spacing.

* Super single tires require the "New Generation, Wide Base" tires with a minimum tire width of 445 mm. Available by permit only. Super single tires do not apply to the steering axle.

** The maximum spread permitted for a tridem axle group on a pony trailer is 2.5 m.

*** These weights for tridem axles apply to provincial highways only. The maximum weight for a tridem axle on a municipal road is 17,000 kg. Permits may be available to achieve heavier weights.

**** All axle weights are subject to minimum tire size. The maximum weight per tire shall not exceed the lesser of the tire manufacturer's weight rating or the width of the tire stamped on the sidewall multiplied by 10 kg/mm.