



SEMI - MOUNTABLE

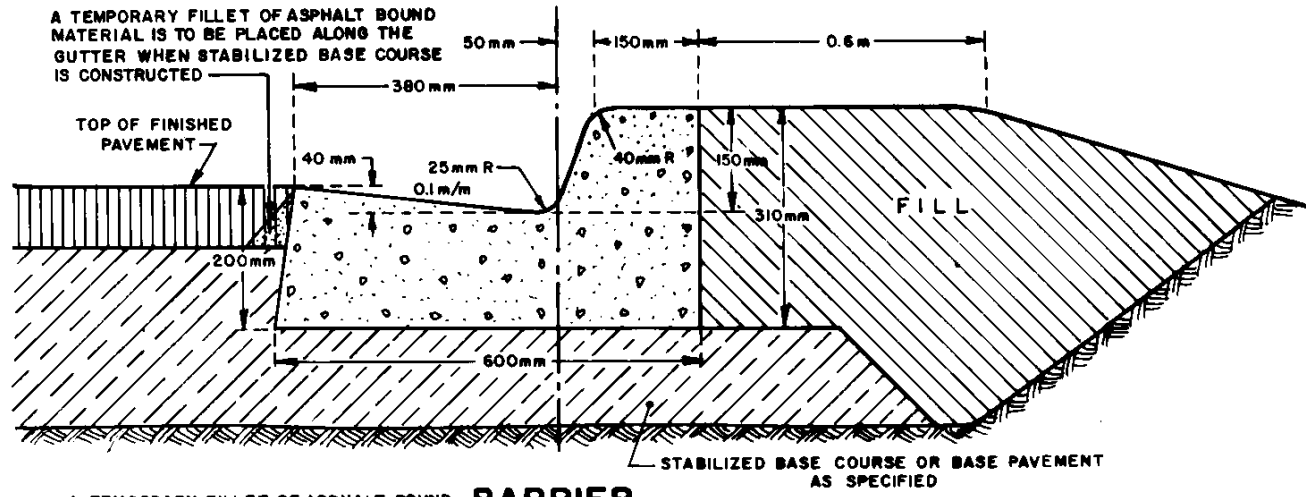

BARRIER

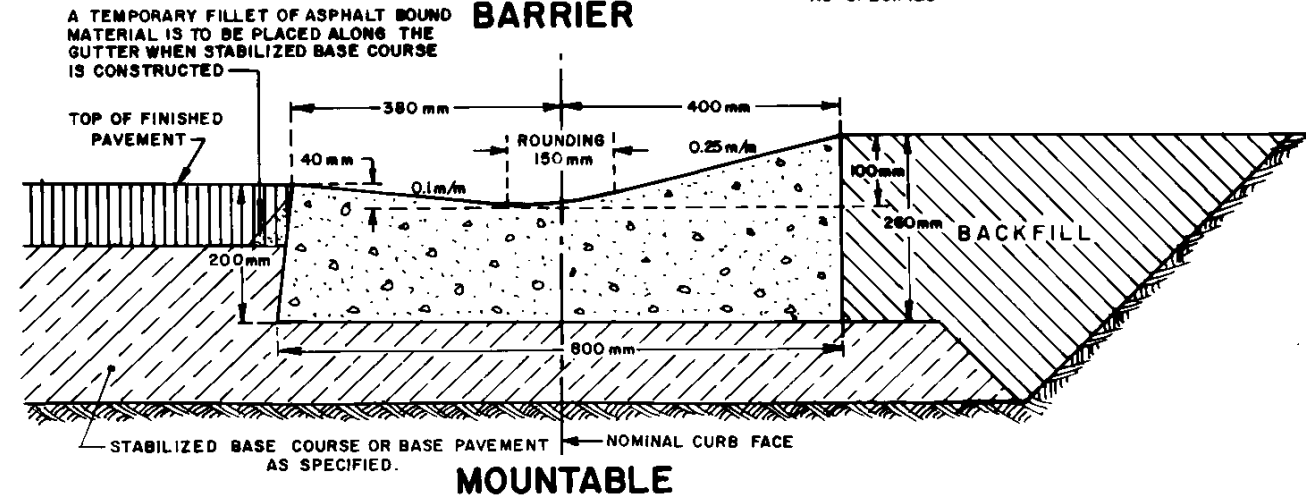

MOUNTABLE

- NOTE:
- EXPANSION JOINTS TO BE PLACED AT IMMOVEABLE STRUCTURES AND AT POINTS OF CURVATURE FOR SHORT RADIUS CURVES ONLY.
 - CONTRACTION JOINTS TO BE PLACED AT INTERVALS NOT EXCEEDING 4.5m. JOINT DEPTH SHALL BE AT LEAST ONE - FOURTH OF CROSS-SECTION DEPTH OF THE CONCRETE.

<p>Alberta TRANSPORTATION Engineering Division</p>	DWG. No	CB - 6 4. 2. M 72
		Date
	Original	May, 1981
	Revised	JULY, 1986
<p>POURED IN PLACE STANDARD 150mm CURB & 380mm GUTTER</p>		