


SECTION A-A (RAISED MEDIAN WITH SEMI-MOUNTABLE CURB)

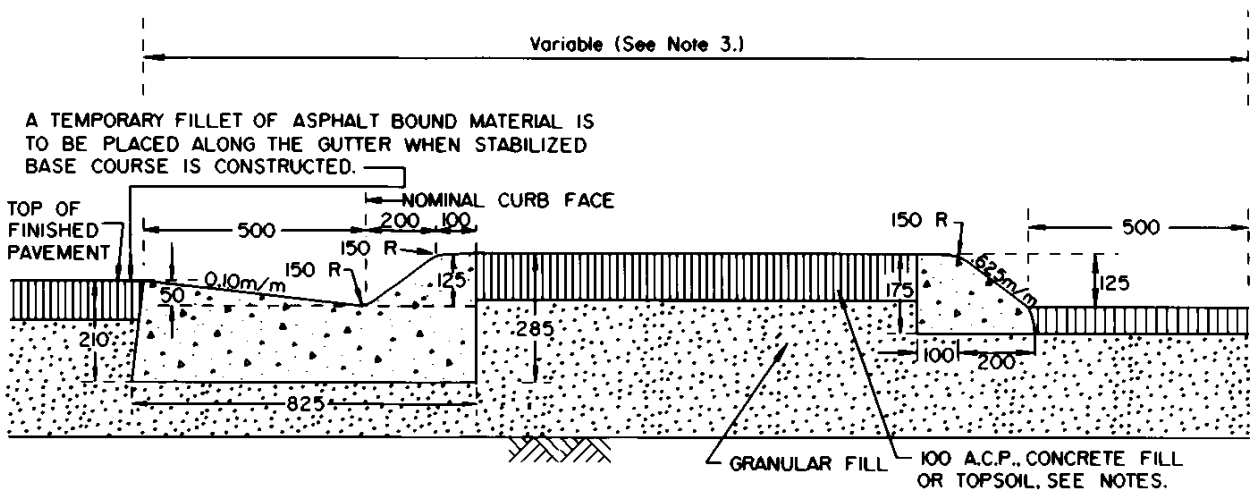



RAISED MEDIAN WITH SEMI-MOUNTABLE CURB ON SUPERELEVATED ROADWAY WHERE GUTTER IS REQUIRED ON ONE SIDE.

NOTES:

1. EXPANSION JOINTS TO BE PLACED AT IMMOVABLE STRUCTURES AND AT POINTS OF CURVATURE FOR SHORT RADIUS CURVES ONLY.
2. CONTRACTION JOINTS TO BE PLACED AT INTERVALS NOT EXCEEDING 4.50m. JOINT DEPTH SHALL BE AT LEAST ONE-FOURTH OF CROSS-SECTION DEPTH OF THE CONCRETE.
3. THE STANDARD MINIMUM MEDIAN RAISED WIDTH IS 6m ON NON-FREEWAY DIVIDED HIGHWAYS. THIS ALLOWS A 3.5m LEFT TURN LANE TO BE PROVIDED TOGETHER WITH A 2.5m WIDTH THAT IS NECESSARY FOR SIGNS AT AT-GRADE INTERSECTIONS.
4. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE SHOWN.
5. ACP FILL IS GENERALLY USED FOR RAISED MEDIAN BETWEEN 5m AND 2m. CONCRETE FILL IS GENERALLY USED FOR MEDIANS LESS THAN 2m WIDE. FOR MEDIANS WIDER THAN 5m, OR FOR LONGER MEDIANS, TOPSOIL FILL MAY BE USED TO PROVIDE A GRASS SURFACE.

△			
△			
No.	REVISIONS	BY	DATE

<p>Approved:</p>  <p>Executive Director, Roadway Engineering Branch</p>	
Date: JUNE 22, 1994	

**TYPICAL CROSS SECTIONS
RAISED MEDIAN WITH
SEMI-MOUNTABLE CURB**

Prepared By: L.T.	Checked By: J.K.	Scale: N.T.S.	Dwg No.: CB6-4.2 M92
-------------------	------------------	---------------	----------------------