



### ALTERNATE 1



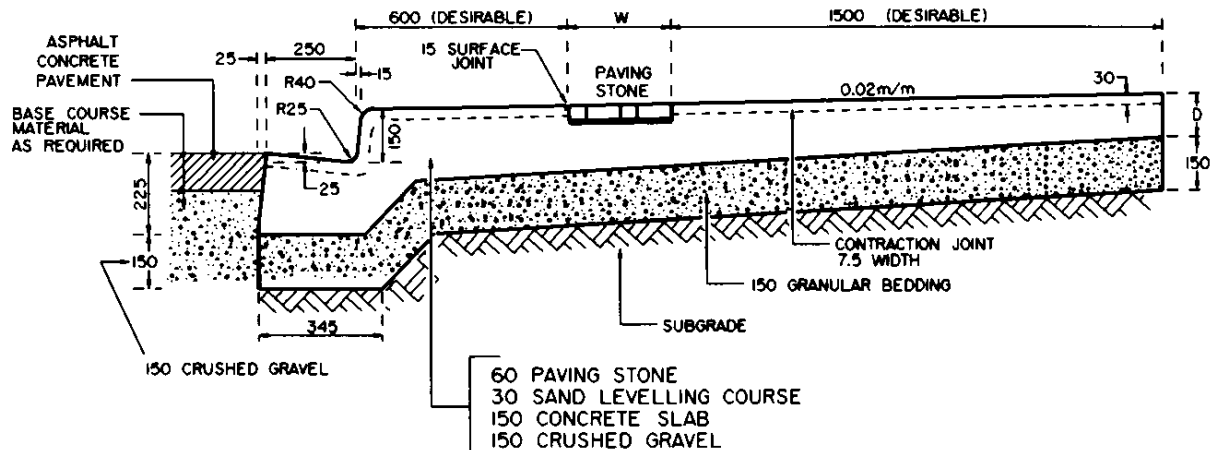

### ALTERNATE 2

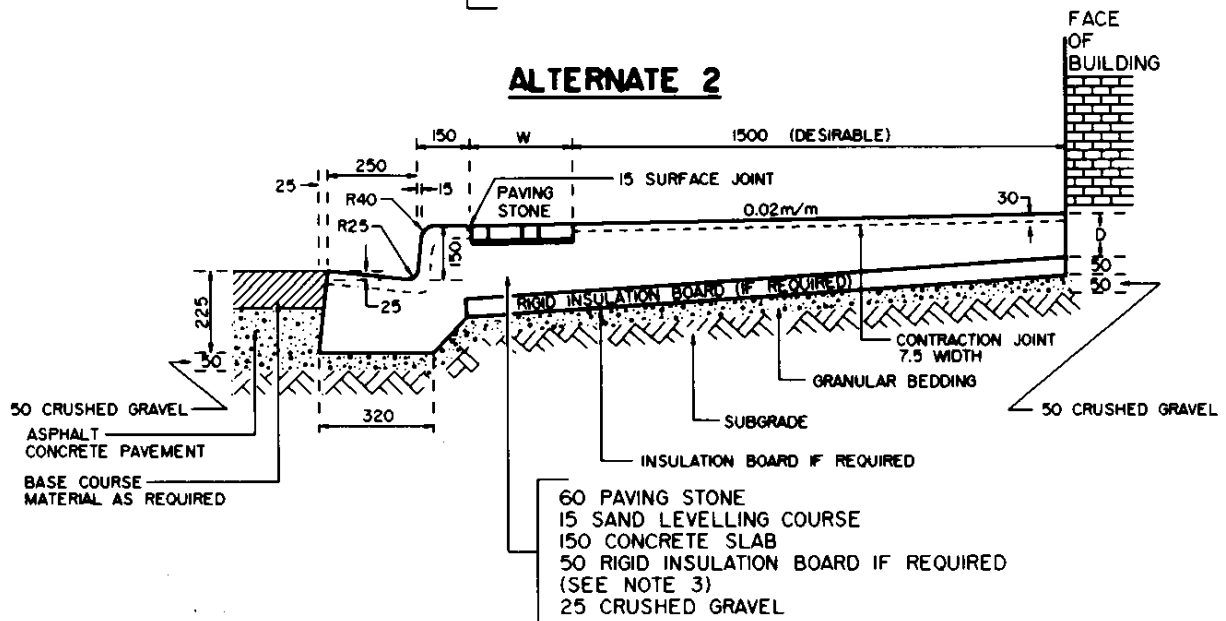

#### NOTES

1. DEPTH OF CONCRETE FOR SIDEWALK 'D' AS PER DETAILED DESIGN.
2. 'W' IS THE WIDTH OF PAVING STONE EDGING GUIDE. THIS MAY BE SELECTED BASED ON OVERALL WIDTH BUT SHOULD NOT CAUSE CONCRETE SURFACE TO BE REDUCED TO LESS THAN 1500mm.
3. ALTERNATIVE 2 IS GENERALLY USED ONLY IN DOWNTOWN AREAS WHERE THE SIDEWALKS ADJACENT TO BUILDINGS AND FREQUENT FREEZE-THAW CYCLES ARE LIKELY TO CAUSE LONGITUDINAL CRACKING.
4. THE GUTTER PAN WIDTH MAY BE ADJUSTED WHERE NECESSARY TO MEET DRAINAGE REQUIREMENTS.
5. ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE NOTED.

▲			
▲			
No.	REVISIONS	BY	DATE
Approved:			
 Executive Director Technical Standards Branch			
Date: DECEMBER 4, 1995			
<b>MONOLITHIC CONCRETE SIDEWALK CURB AND GUTTER (250mm GUTTER) PAVING STONE EDGING</b>			
Prepared By: R.M.	Checked By: B.J.	Scale: N.T.S.	Dwg No: CB6-4.2M93