


- LEGEND:**
- \$ SINGLE POLE SWITCH
 - 120V LED SURFACE MOUNTED LIGHT (7W)
 - 120V LED WALL MOUNTED LIGHT (7W)
DAMP PROOF COVER
 - R 120V LED RECESSED FLOOD LIGHT (4W)
 - WP GFI 110V DUPLEX RECEPTACLE
WEATERPROOF, GROUND FAULT INTERRUPT
 - ▶ MOTION SENSOR
 - T THERMOSTAT
 - PHC PHOTO CELL
 - BRK PANEL BREAKER PANEL - 125A 18 CIRCUIT
60A MAIN, 1-30A 2 POLE BREAKER,
8-15A 1 POLE
 - F INLINE FAN
50 CFM @ 1" WATER, PVC SHELL
 - P CIRCULATION PUMP
 - RHEOSTAT
TO CONTROL INLINE FAN
 - RADIATOR HOT WATER RADIATOR
700 x 900 SINGLE PASS
 - HWT HOT WATER TANK
40,000 BTU PROPANE TANK SUITABLE
FOR HYDRONIC HEATING, MICRO ELECTRIC
THERMOSTAT, PILOT LIGHT

← ROOF OUTLINE

- NOTES:**
- ALL DIMENSIONS SHOWN IN MILLIMETRES
 - WORK THESE DRAWINGS TOGETHER
CB6-4.6M1 TO 14A, 16, 18 TO 20
 - USE THIS DRAWING ONLY WHERE SOLAR
POWER IS SPECIFIED
 - SUPPLY 1 SPARE BULB OF EACH STYLE
TO EACH BUILDING

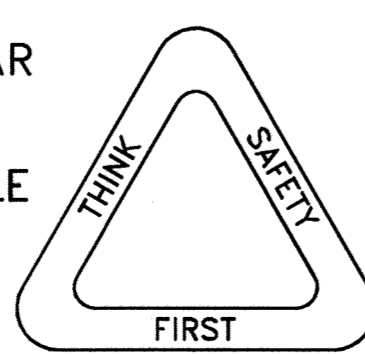

TOILET SOLAR POWER AND MECHANICAL PLAN
N.T.S.

CAD FILE No. Washroom-ElecRoadside5

△			
△			
△	2013-01-18	REVISED SHEET SURROUND	AN
△	2012-02-07	REDRAWN	AN
REV	DATE	REVISIONS	BY
DESIGNER	AN	CHECKER	

**DOUBLE TOILET
SOLAR-POWER ELECTRICAL AND
MECHANICAL LAYOUT PLAN**

DEPARTMENT BAR CODE	DATE	SHEET	DRAWING
	2012-02-07	17 OF 21	CB6-4.6M16