


# Log Truck + 4 Axle Trailer Regulation Summary

## Part 1 – Dimension Limits

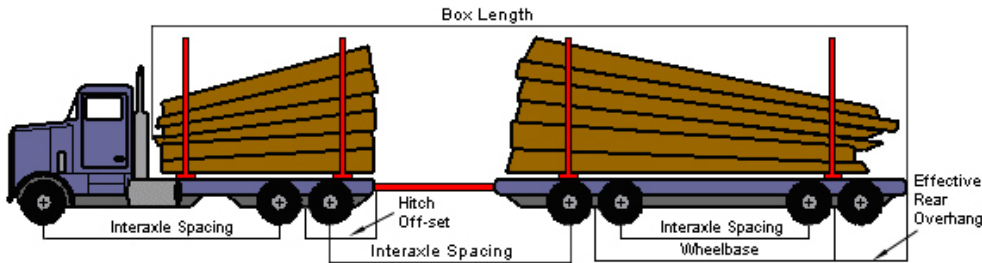

### DIMENSION LIMIT

Overall Length	Maximum 23.0 metres
Overall Width	Maximum 2.6 metres
Overall Height	Maximum 4.15 metres
Box Length	Maximum 20.0 metres
<b>Truck</b>	
Length	Maximum 12.5 metres
Wheelbase	Not controlled
Effective rear overhang	Maximum 4.0 metres
Hitch offset	Maximum 1.8 metres
<b>4 Axle Trailer (Full Trailer)</b>	
Length	Maximum 12.5 metres
Wheelbase	Minimum 6.25 metres
Effective Rear Overhang	Maximum 4.0 metres
Tandem Axle Spread	Minimum 1.2 metres / Maximum 1.85 metres
Track Width	Minimum 2.5 metres / Maximum 2.6 metres
<b>Interaxle Spacings</b>	
Single Steer to Tandem Axle	Minimum 3.0 metres
Tandem Axle to Tandem Axle	Minimum 5.0 metres

### Definitions as per [Commercial Vehicle Dimension and Weight Regulation AR315/2002](#)

#### Effective rear overhang

The longitudinal distance from the turn centre of the rear axle group of a commercial vehicle to the rearmost point of:

- (i) the vehicle, or
- (ii) the load on the vehicle,


whichever is the greater distance

#### Hitch Offset

The longitudinal distance from the rear turn centre of a semi-trailer, truck or full trailer to the centre of the hitching mechanism provided for towing a trailer behind the semi-trailer, truck or full trailer

### Track Width


The overall width of an axle measured from the outside of the outside tire located on one side of the vehicle to the outside of the outside tire located on that axle on the other side of the vehicle at any point above the lowest point of the rim



### Truck Tractor Wheelbase

The longitudinal distance from the centre of the steering axle or twin steer axle group located on a truck tractor to the turn centre

## Part 2 – Weight Limits

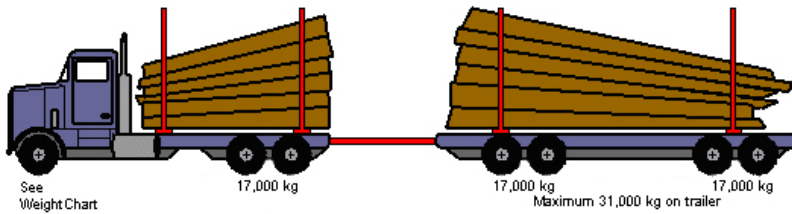

### WEIGHT LIMIT

Steering Axle	Maximum 7,300 kg
Tandem Drive Axle – Dual tires	Maximum 17,000 kg
Tandem Trailer Axle – Dual tires	Maximum 17,000 kg
	Maximum combination weight of 31,000 kg on trailer
Gross Vehicle Weight Limits	
<a href="#">See Weight Calculator</a>	Cannot exceed the sum of the maximum regulated axle weights and is subject to minimum interaxle spacing.

**Note:** All axle weights are subject to minimum tire size (Chart below)

Maximum steering axle weight as per [Commercial Dimension and Weight Regulation AR 315/2002](#)

**9(1)** Subject to section 62 of the Act and section 12(1) of this Regulation, no person shall operate a commercial vehicle on a highway when

- (a) the gross weight on a tire exceeds the smallest of the following:
  - (i) 3650 kilograms;
  - (ii) the capacity determined by multiplying the cross section dimension of the tire in millimetres, as determined by the manufacturer's width shown on the tire, by 10 kg;
- (b) the gross weight on
  - (i) a steering axle exceeds
    - (A) in the case of a truck tractor, 5500 kilograms;
    - (B) in the case of a truck, bus, picker truck, bed, truck or winch truck, 7300 kilograms

### STEERING AXLE TIRE WEIGHT CHART FOR TRUCKS

ALLOWABLE STEERING AXLE WEIGHTS	ALLOWABLE STEERING AXLE WEIGHTS	PICKER STEERING WEIGHTS WITH ANNUAL PERMIT
---------------------------------	---------------------------------	--------------------------------------------

Tire Size	Single Steer	Tire Size	Single Steer	Tire Size	Tire Size	Single Steer
(inches)	Maximum Weight (kg)	(mm)	Maximum Weight (kg)	(inches)	(mm)	Maximum Weight (kg)
210	5, 100	285	5, 700			
211	5, 600	305	6, 100			
212	6, 100	315	6, 300			
213	6, 600	335	6, 700			
214	7, 100	365	7, 300			
215	7, 300	385	7, 300	215	385	7,700
216	7, 300	425	7, 300	216	425	8,500
218	7, 300	445	7, 300	218	445	9,100